BWT
BEST WATER TECHNOLOGY



WATER DISPENSER

AQA drink Pro 20

COMPACT, POWERFUL ALL-ROUNDER WITH UV TECHNOLOGY


A suitable place can always be found for the grid-bound AQA drink Pro 20, as a table-top or floor-standing unit, with its compact design and installation possibilities. There are three different models to choose from, whereby each unit is equipped with three water options. Depending on individual taste you can have still, cold, sparkling or hot water at the push of a button. With a capacity of 20 l/h for cold and sparkling water, the unit is ideal for all areas with medium water consumption. Thanks to the use of UV light at the water output, you can enjoy your daily water with hygienic safety.

Base Cabinet

The base cabinet forms the basis of the floor-standing model. It offers space for the filter and the CO_2 bottle, as well as for a mounted approx. 3 l waste water tank with waste water level sensor, in the upper area. A further advantage is the integrated cup dispenser, which can be used with standard cups that have a capacity of 180 ml.

Filter technology for Magnesium Mineralized Water

The appropriate BWT AQA drink filter cartridge with patented BWT Magnesium Technology, transforms tap water into an enjoyable taste experience. For hygienic safety we recommend filters with an integrated ultrafiltration membrane that retains 99.9999% of bacteria and microplastics up to 0.001 mm.

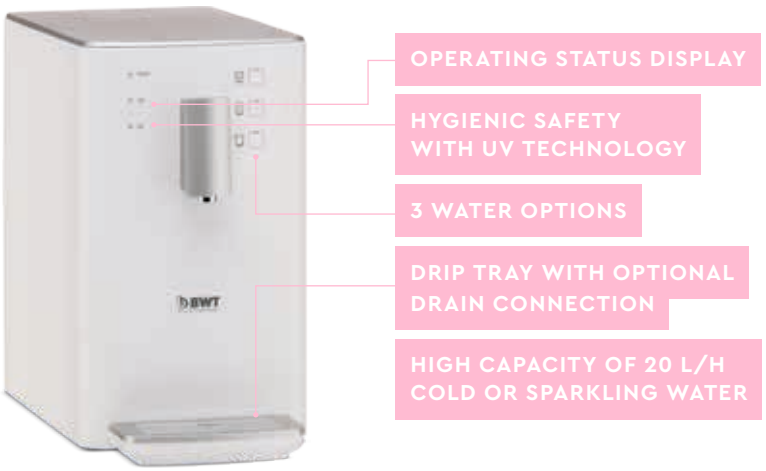



OVERVIEW DATA

GENERAL INFORMATION		CAS	HCS	HCA
ARTICLE NUMBER WATER DISPENSER		825060	825061	825062
ARTICLE NUMBER BASE CABINET			825063	
TYPE			tabletop/floor-standing model	
AVAILABLE IN THE COLOURS			white	
WATER OPTIONS		**CAS**	**HCS**	**HCA**
AMBIENT, STILL		✓	–	✓
COLD, STILL		✓	✓	✓
COLD, WITH CO_2		✓	✓	–
HOT		–	✓	✓

TECHNICAL DATA

OPERATING CONDITIONS		CAS	HCS	HCA
WATER DELIVERY AT ROOM TEMPERATURE, STILL	l/h		>120	
WATER DELIVERY COLD, STILL/CO_2	l/h	20	20	20
WATER DELIVERY HOT	l/h	–	9	9
WATER TEMPERATURE COLD*	°C	4–12	4–12	4–12
WATER TEMPERATURE HOT	°C	–	90–95	90–95
FLOW SPEED	l/min	>2	>2	>2
MAX. COOLING POTENTIAL	W	150	150	150
MAX. HEATING POTENTIAL	W	–	500	500
UV LAMP OUTPUT	W	11	11	11
INLET WATER PRESSURE recommended | max.	bar	3 | 5	3 | 5	3 | 5
CO_2 PRESSURE recommended | max.	bar	3.5 | 4	3.5 | 4	–
COOLING TECHNOLOGY | COOLANT			fluid cooling | R134a (36 g)	
LEAKAGE PROTECTION			yes	
CONNECTIONS		**CAS**	**HCS**	**HCA**
MAINS VOLTAGE | -FREQUENCY	V | Hz		220–240 | 50	
TOTAL POWER CONSUMPTION	W	230	730	700
DRINKING WATER CONNECTION	Inches		1/4	
CO_2 CONNECTION	Inches	1/4	1/4	–
WASTE WATER CONNECTION/-TANK			optional	
DIMENSIONS & WEIGHTS		**CAS**	**HCS**	**HCA**
WATER DISPENSER DIMENSIONS W x H x D	cm		23 x 39 x 36	
BASE CABINET DIMENSIONS W x H x D	cm		23 x 80 x 36	
TAPPING HEIGHT	cm		21.5	
NET WEIGHT, WATER DISPENSER	kg	18	20	18
GROSS WEIGHT, WATER DISPENSER	kg	21	24	21

* at 20 °C inlet temperature

PROVEN QUALITY: CE RoHS

BWT
BEST WATER TECHNOLOGY

BWT UK Limited
Suite G, Artisan, Hillbottom Road,
High Wycombe, Buckinghamshire, HP12 4HJ

+44 1494 838100
enquiries@bwt-uk.co.uk