

Combi Care

Physical scale control



HOW IT WORKS

The Combi Care works by introducing a very small amount of food grade polyphosphate into the water feed, sequestering the calcium in the water, helping to prevent the formation of scale on the heat exchanger.

FEATURES & BENEFITS

- » Combination scale and corrosion inhibitor, offers protection from limescale and corrosion
- » 120,000L capacity
- » Suitable for whole house or single appliance protection
- » Easy change cartridge - 12 month life
- » Can also be used in soft water areas as a corrosion inhibitor

Technical specifications


COMBI CARE MODEL NUMBER	AC002100	AC002200
Pipe Size	15	22
Fitting Type	Compression	Compression
Width (mm)	120	120
Height (mm)	220	220
Maximum Flow Rate (L/S)	0.5	0.9
Maximum Pressure (Bar)	5	5
Maximum Water Temperature (°C)	30	30
Maximum Ambient Temperature (°C)	35	35
Capacity (L)	120,000	

Replacement cartridge

- » Suitable for both 15mm and 22mm sizes
- » Easy change cartridge
- » 12 month life



The flow of water through the Combi Care Scale + Corrosion Inhibitor is just as effective when mounted on a vertical pipe as it is on a horizontal one.

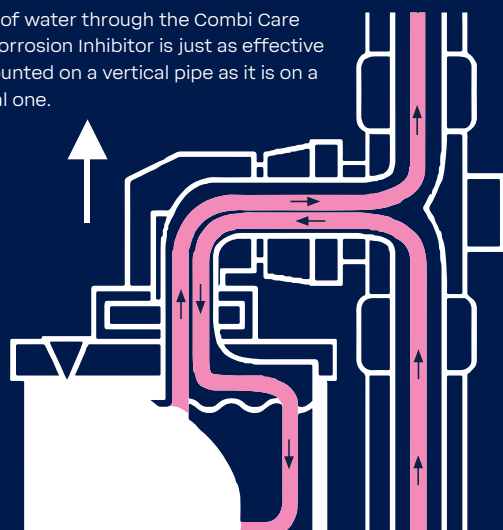

- » These units will be affected by hot water transfer back down the system, therefore, they must be installed as far away from the boiler as possible (minimum 1m)
- » Do not install in areas where the ambient temperature is likely to exceed 35°C
- » Do not over tighten fittings or use a pipe wrench on the body of the unit
- » Unit must be adequately supported on both sides of the installation and correctly aligned to avoid stress to the unit or joints
- » Protect from freezing